

NEW PRODUCT

Panel mounting type modular jack

MMJ CONNECTOR

This MMJ connector can be used outdoors. By adopting the metal shell, high resistance to environment was realized.



■ Features

● **Metal shell**

By using metal shell, the connector can be used outdoors.


● **Protection of metal shell from salt damage**

Surface finish of metal shell to protect from salt damage has been adopted.

● **Dustproof & Waterproof Performance**

High dustproof & waterproof performance as IP67 of JIS C 0920/IEC 60529 is provided.

● **This product is specified by UQ Communications Inc. (RJ-45 Waterproof connector)**

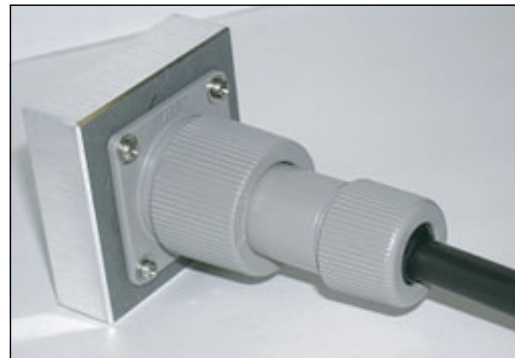

JST

■ Part name & Part number

Part name	Part number
Wire shell assembly	MMJ-08WSA-33H
Panel shell kit	MMJ-08PSK-33H
Cap shell assembly	MMJ-CSA-33H100

■ Applicable part name and part number

Part name	Part number
MJ Connector	MJ-88F-SP305K-GA
	MJ-88U-SD315K-T

Note:

These MJ connector shall be assembled in panel kit and used.

■ Specifications

- Current rating : 1.3A AC,DC
- Voltage rating : 250 V AC,DC
- Temperature : -40°C to +80°C (including temperature range rise in applying electrical current)
- Contact : Initial value/20mΩ max.
resistance : After environmental testing/40mΩ max.
- Insulation : 1,000 MΩ min.
resistance
- Withstanding : 1,000 V AC/1 minute
voltage
- Applicable : Insulation O.D./9.0 to 12.0mm
wire range

J.S.T. MFG. CO., LTD.

<http://www.jst-mfg.com>